

SUSPENSION STRAP

FIXING & SEALING

SUSPENSION STRAP is a flexible multifunctional perforated strap for mounting various parts in air conditioning and ventilation systems.

CONSTRUCTION

SUSPENSION STRAP is available in 2 different versions, galvanized and copolymer coated. The SUSPENSION STRAP with the copolymer coating is preferable for systems, which can be damaged by sliding or swinging. The SUSPENSION STRAP is provided with holes for mounting, the holes enable to processing various diameters.

SUSPENSION STRAP is available in two linear measures: 10 and 20 meters. The width is 17 or 19 mm. SUSPENSION STRAP is available in boxes or on rolls.

The ordering code is:

Copolymer coated suspension strap, 10 meters: **PP019S**
Copolymer coated suspension strap, 20 meters: **PP019/BOX**
Galvanized suspension strap, 10 meters: **PZ017S**
Galvanized suspension strap, 20 meters: **PZ017/BOX**





| Ordering code | Version | Width x length | Thickness | Packaging | Size holes |
|---------------|------------------|----------------|-----------|-----------|---------------|
| PP019S | Copolymer coated | 19 mm x 10 m | 1 mm | Rolls | M6 |
| PP019/BOX | Copolymer coated | 19 mm x 20 m | 1 mm | Box | M6 |
| PZ017S | Galvanized | 17 mm x 10 m | 0.7 mm | Rolls | 6.8mm + 3.5mm |
| PZ017/BOX | Galvanized | 17 mm x 20 m | 0.7 mm | Box | 6.8mm + 3.5mm |

The New **SUSPENSION STRAP** is a flexible multifunctional perforated strap for mounting various parts in air conditioning and ventilation systems.

- Galvanised steel
- 25 m per roll (others on request) (30m PZK**versions)
- Supplied in bundles of 5 rolls

Perforated suspension band – bundles of 5 rolls

| Code | Width | Thickness | Holes details | |
|-----------------|-------|-----------|----------------|------------|
| | | | Large | Small |
| PZ176OV | 17 mm | 0,6 mm | Oval 6,5x12mm | Dia. 3,3mm |
| PZ176RD | 17 mm | 0,6 mm | Round 8,5mm | Dia. 4,2mm |
| PZ206RD | 20 mm | 0,6 mm | Round 8,5mm | Dia. 4,2mm |
| PZ208RD | 20 mm | 0,75 mm | Round 8,5mm | Dia. 4,2mm |
| PZ258RD | 25 mm | 0,75 mm | Round 8,5mm | Dia. 4,2mm |
| PZK258OV | 25 mm | 0,75 mm | Oval 10,5x20mm | |
| PZK259OV | 25 mm | 0,90 mm | Oval 10,5x20mm | |

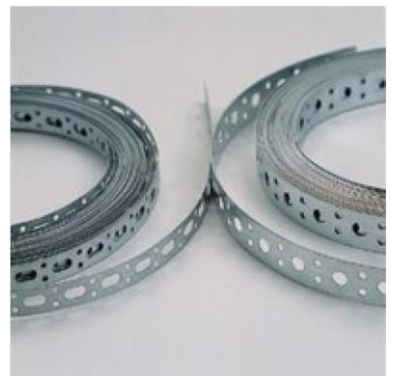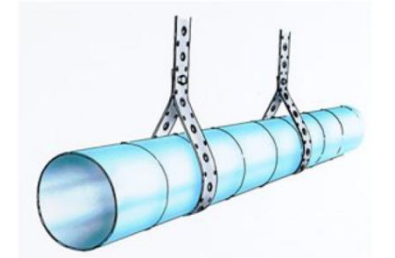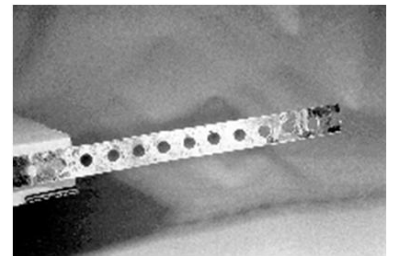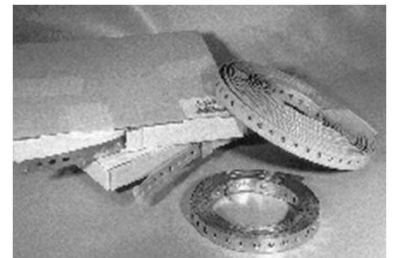

LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:

DEC International and the DEC logo are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.